

ProGuard NRP Lite Panel

Composite panel, 1 pc per 3 m post spacing · ProGuard NRP Lite enclosure

TECHNICAL FEATURES

Description

Composite panel for ProGuard NRP Lite, one panel per 3 m post spacing, made from a durable composite material that gives a visually blocked, enclosed workspace where noise attenuation demands are lower. Fewer components make it ideal where time is critical. A standard installation gives a 2.0 m high enclosure, 2.6 m with the Top-Up mesh.

2.0 m

Enclosure height

2.6 m

With Top-Up mesh

10 kg

Panel weight

For CB

Mounts on ProGuard
CB

GENERAL

Product type	Composite screening panel for site enclosure
Application	Visually blocked, enclosed workspace on ProGuard CB where noise attenuation demands are lower
System components	NRP Post MkII Art. 10330 · NRP Lite Panel Holder Art. 10340 · NRP Lite Clamp Art. 10405 · Top-Up MkII mesh Art. 10345 · transparent sheet Art. 10460

DIMENSIONS & WEIGHT


Length	3000 mm
Width (thickness)	10 mm
Height	1200 mm
Weight	10 kg
Panels per post spacing	1 per 3 m

CONFIGURATION

Standard installation	2.0 m high enclosure
With Top-Up mesh	2.6 m high
Material	Durable composite

HANDLING & FEATURES

Installation	Two people with hand tools only · fewer components than NRP
Post compatibility	Same post carries NRP panels, NRP Lite panels or building boards of 8 to 15 mm

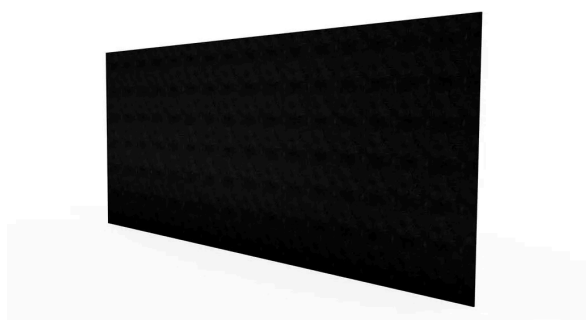

ProGuard NRP is the noise-reducing enclosure system for ProGuard CB: a robust, fully opaque wall around the site that two people install with hand tools only. NRP and NRP Lite share the same post; the Top-Up mesh raises the enclosure to 2.6 m.